


AR 35-LED




New



Flat Recessed LED Luminaire for the 35 Cut-out

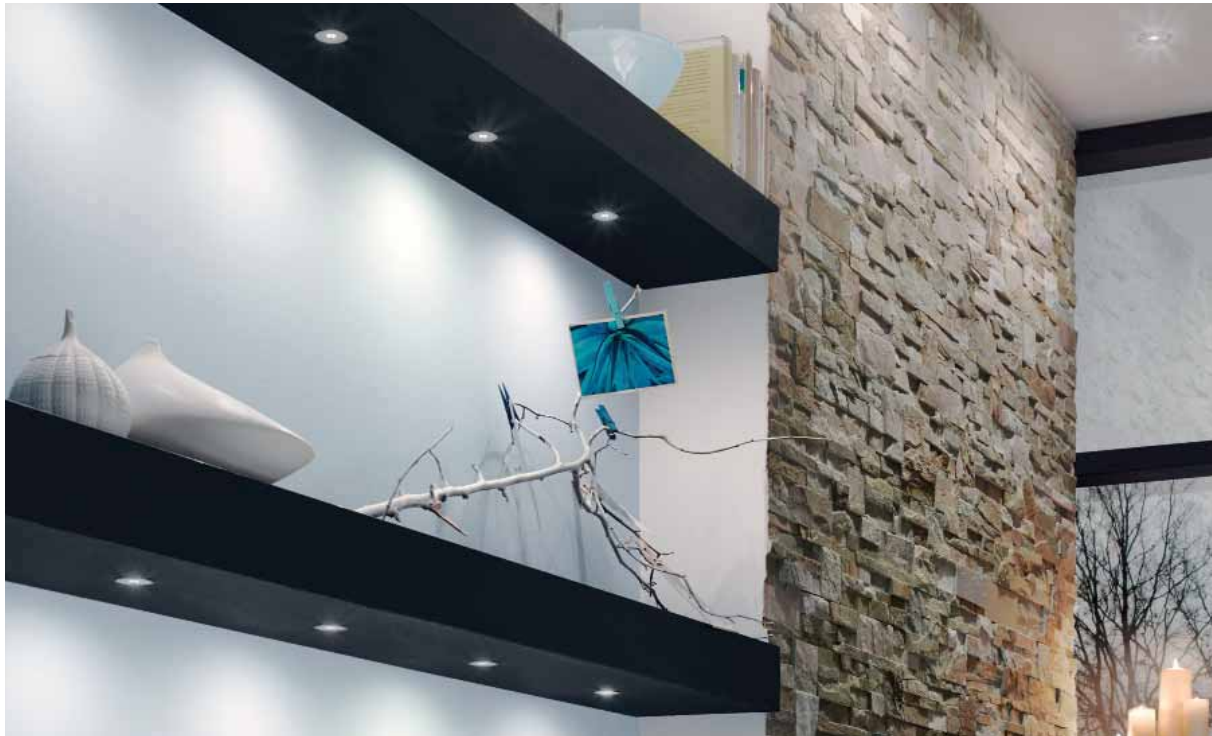

- Connection:** LED-transformer DC 24 V
- Lamp:** extremely long-life 6 x 416 mW LED, \varnothing life 30.000 hours
- Energy efficiency:** LED: 80 lm/W Luminaire: **138 lm** (55 lm/W); this luminaire contains built-in, not changeable LED lamps of the energy efficiency class A to A++
- Colour rendering:** very good, Ra/CRI > 90
- Special features:** low power consumption; no UV rays; metal casing; genuine glass cover; with mounting spring also ideal for the use in plasterboard ceilings

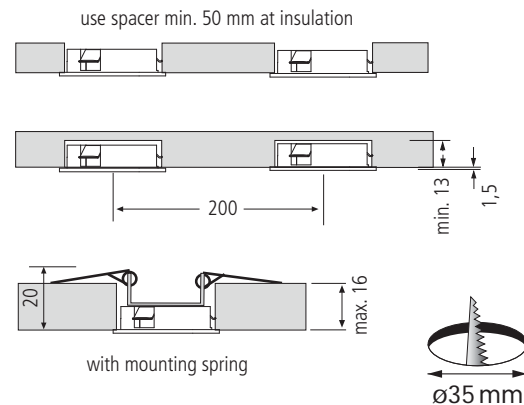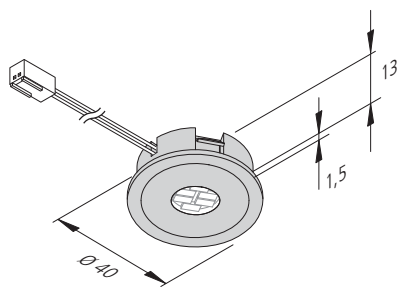

Article No.	Description	Illustration	Features	Weight
202 025 302 01	AR 35-LED 2,5W ww stainless steel		<ul style="list-style-type: none"> • Colour appearance ww (warm white) appr. 3000 K • Supply cable 2,5 m with LED 24 plug 	47 g
202 025 303 01	AR 35-LED 2,5W nw stainless steel		<ul style="list-style-type: none"> • Colour appearance nw (neutral white) appr. 4000 K • Supply cable 2,5 m with LED 24 plug 	47 g
615 000 301 21	Mounting spring AR 35		<ul style="list-style-type: none"> • for mounting in lightweight design ceilings or aluminium profiles 	15 g
215 300 610 01	LED 24 connecting cable 1m		<ul style="list-style-type: none"> • further information on page 140 	9 g
215 300 625 01	LED 24 connecting cable 2,5m			22 g
Accessories:	LED Transformers 24V from page 132 Dim Controller page 138			

¹⁾ Blind hole mounting